


- Utilizes standard 4 in 1 stripper rubber
- Hinderlok™ slips are standard

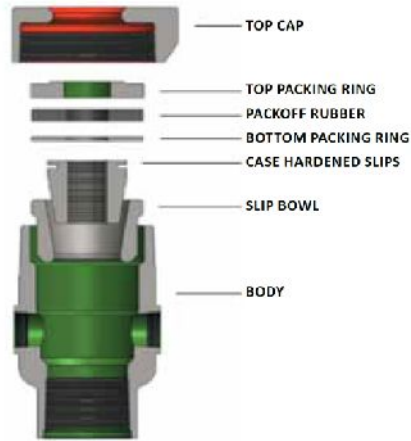

**MODEL "HW"**

<b>SPECIFICATIONS</b>			
<b>Bottom Thread</b>	4-1/2" O.D. 8rd	5-1/2" O.D. 8rd	7" O.D. 8rd
<b>Bottom Connection</b>	Male, Female	Male, Female	Female
<b>Working Pressure</b>	2000 PSI	2000 PSI	2000 PSI
<b>Test Pressure</b>	4000 PSI	4000 PSI	4000 PSI
<b>Max. Slip Load (2:1 SF)</b>	83,000 lbs.	83,000 lbs.	83,000 lbs.
<b>Cap Thread</b>	8-1/4" 6-UN	8-1/4" 6-UN	8-1/4" 6-UN
<b>Cap Material</b>	Ductile Iron	Ductile Iron	Ductile Iron
<b>Inner String &amp; Stripper Rubbers</b>	2-3/8" & 2-7/8"	2-3/8" & 2-7/8"	2-3/8" & 2-7/8"
<b>Suspension</b>	Slip or Mandrel	Slip or Mandrel	Slip or Mandrel
<b>Side Outlet</b>	2" LP	2" LP	2" LP
<b>Minimum Bore</b>	4.090"	5.012"	6.551"
<b>Body Material</b>	Ductile Iron	Ductile Iron	Ductile Iron
<b>Height</b>	12-1/4" (HWS 18-3/4")	12-1/2" (HWS 19")	12" (HWS 18-1/2")
<b>Weight</b>	130 lbs. (HWS 200 lbs.)	120 lbs. (HWS 190 lbs.)	118 lbs. (HWS 187 lbs.)

Hinderlok™ is a trademark name of Larkin Products, LLC