


- Model "K" available with:
  - Mandrel (MK)
  - Stripper Rubber (SK)

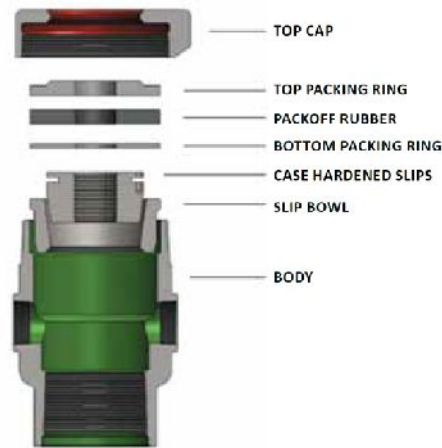

**MODEL "K"**

| <b>SPECIFICATIONS</b>                     |                          |                                  |                                  |
|---|--------------------------|----------------------------------|----------------------------------|
| <b>Bottom Thread</b>                      | 4-1/2" O.D. 8rd*         | 5-1/2" O.D. 8rd*                 | 7" O.D. 8rd*                     |
| <b>Bottom Connection</b>                  | Male, Female             | Male, Female                     | Male, Female                     |
| <b>Working Pressure</b>                   | 1500 PSI                 | 1500 PSI                         | 1500 PSI                         |
| <b>Test Pressure</b>                      | 3000 PSI                 | 3000 PSI                         | 3000 PSI                         |
| <b>Max. Slip Load (2:1 SF)</b>            | 65,000 lbs.              | 65,000 lbs.                      | 65,000 lbs.                      |
| <b>Cap Thread</b>                         | 7-5/8" API Mod.**        | 7-5/8" API Mod.**                | 7-5/8" API Mod.**                |
| <b>Cap Material</b>                       | Ductile Iron             | Ductile Iron                     | Ductile Iron                     |
| <b>Inner String &amp; Stripper Rubber</b> | 2-1/16", 2-3/8" & 2-7/8" | 2-1/16", 2-3/8", 2-7/8" & 3-1/2" | 2-1/16", 2-3/8", 2-7/8" & 3-1/2" |
| <b>Suspension</b>                         | Slip or Mandrel          | Slip or Mandrel                  | Slip or Mandrel                  |
| <b>Side Outlet</b>                        | 2" LP                    | 2" LP                            | 2" LP                            |
| <b>Minimum Bore</b>                       | 4.090"                   | 5.012"                           | 6.456"                           |
| <b>Body Material</b>                      | Carbon Steel             | Carbon Steel                     | Carbon Steel                     |
| <b>Height</b>                             | 10-1/8" (SK 14-1/2")     | 10-1/8" (SK 14-1/2")             | 10-1/8" (SK 14-1/2")             |
| <b>Weight</b>                             | 65 lbs. (SK 96 lbs.)     | 65 lbs. (SK 96 lbs.)             | 65 lbs. (SK 96 lbs.)             |

\* Other thread styles available upon request of special order

\*\* Caution: WSI recommends using only API modified threaded WSI drilling flanges