



- MLE adapter flange also accepts all model "R" internal components to convert back to beam pump or when running liner packages



**MODEL "MLE"**

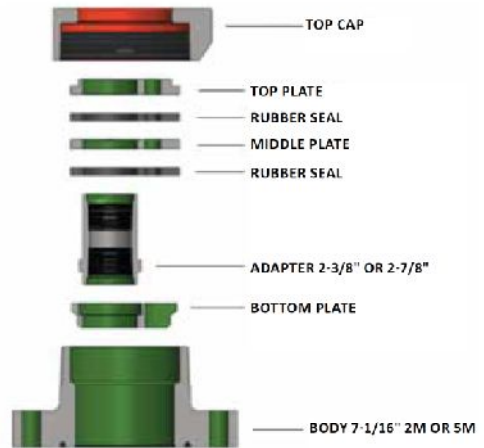

**MODEL "MLE"**

SPECIFICATIONS		
MLE Adapter Flange	7 1/16" API, 3M	7-1/16" API, 5M
Bottom Connection	7-1/16" Flange API	7-1/16" Flange API
Working Pressure	2000 PSI	2000 PSI
Test Pressure	4000 PSI	4000 PSI
Max. Hanger Load (2:1 SF)	85,000 lbs.	85,000 lbs.
Cap Thread	8-5/8" API Modified	8-5/8" API Modified
Cap Material	Ductile Iron	Ductile Iron
Inner String	2-3/8" & 2-7/8"	2-3/8" & 2-7/8"
Suspension	Threaded	Threaded
Side Outlet	N/A	N/A
Minimum Bore	6.551"	6.551"
Body Material	Carbon Steel	Carbon Steel
Height	9"	9"
Weight	120 lbs.	120 lbs.

**IMPORTANT NOTE:** Specify cable diameter and style (round/flat) when ordering.