


MODEL "612"

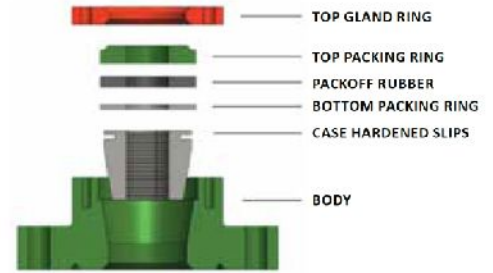

- Model "612" slip type adapter also available in:
 - 10,000 PSI connection
 - 15,000 PSI connection
- Model "612" slip type adapter available in 11"
 - 3000 PSI connection
 - 5000 PSI connection
- **NOTE:** Slip flange top de-rates all heads to 3000 PSI Max.

SPECIFICATIONS			
Bottom Thread	4-1/2" O.D. 8rd	5-1/2" O.D. 8rd	7" O.D. 8rd
Bottom Connection	Female, SOW	Female, SOW	Female, SOW
Working Pressure	2000, 3000 or 5000 PSI	2000, 3000 or 5000 PSI	2000, 3000 or 5000 PSI
Test Pressure	2:1 SF	2:1 SF	2:1 SF
Max. Slip Load (2:1 SF)	85,000 PSI	85,000 PSI	85,000 PSI
Flange Material	Carbon Steel	Carbon Steel	Carbon Steel
Inner String	2-1/16", 2-3/8" & 2-7/8"	2-1/16", 2-3/8", 2-7/8" & 3-1/2"	2-1/16", 2-3/8", 2-7/8" & 3-1/2"
Suspension	Threaded, Slips or Mandrel	Threaded, Slips or Mandrel	Threaded, Slips or Mandrel
Side Outlet	2" LP	2" LP	2" LP
Minimum Bore	4.090"	5.012"	6.551"
Body Material	Carbon Steel	Carbon Steel	Carbon Steel
Height	20-1/4"	20-1/4"	20-1/4"
Weight	350 lbs.	350 lbs.	350 lbs.