


**MODEL "613"**

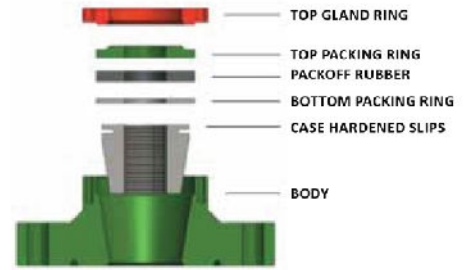

**MODEL "SF"**

- Model "613" available in:
  - 3,000 PSI
  - 5,000 PSI
- **NOTE:** Slip flange top de-rates all heads to 3000 PSI Max.

**SPECIFICATIONS**

<b>Bottom Thread</b>	4-1/2" O.D. 8rd	5-1/2" O.D. 8rd	7" O.D. 8rd
<b>Bottom Connection</b>	Female, SOW	Female, SOW	Female, SOW
<b>Working Pressure</b>	2000, 3000 or 5000 PSI	2000, 3000 or 5000 PSI	2000, 3000 or 5000 PSI
<b>Test Pressure</b>	4000, 6000 or 10,000 PSI	4000, 6000 or 10,000 PSI	4000, 6000 or 10,000 PSI
<b>Max. Slip Load (2:1 SF)</b>	85,000 PSI	85,000 PSI	85,000 PSI
<b>Flange Material</b>	Carbon Steel	Carbon Steel	Carbon Steel
<b>Inner String</b>	2-1/16", 2-3/8" & 2-7/8"	2-1/16", 2-3/8", 2-7/8" & 3-1/2"	2-1/16", 2-3/8", 2-7/8" & 3-1/2"
<b>Suspension</b>	Thread, Slips or Mandrel	Thread, Slips or Mandrel	Thread, Slips or Mandrel
<b>Side Outlet</b>	2" LP	2" LP	2" LP
<b>Minimum Bore</b>	4.090"	5.012"	6.551"
<b>Body Material</b>	Carbon Steel	Carbon Steel	Carbon Steel
<b>Height</b>	20-1/4"	20-1/4"	20-1/4"
<b>Weight</b>	350 lbs.	350 lbs.	350 lbs.