



Model BSSP Stuffing Box (BSSP)

- Easy to adjust threaded cap – **NO BOLTS** (great in steam & high salt water cut areas)
- Low profile design, ideal for short stroke pumping units
- Reduces costly packing maintenance time
- Even adjustment of packing every time!
- Convenient protection of packing when stacking out rods



Model BSTB™ Stuffing Box (BSTB™)

- Easy to adjust threaded cap – **NO BOLTS** (great in steam & high salt water cut areas)
- Eliminates one connection
- Low profile design, ideal for short stroke pumping units
- Standard brass inverter ring reduces polished rod scaring
- Even adjustment of packing every time!




Model BSDP Stuffing Box (BSDP)

- Easy to adjust threaded cap – **NO BOLTS** (great in steam & high salt water cut areas)
- Oil Field Grade rugged box, built for performance under tough conditions
- Lower profile compared to "Classic" model double packed stuffing box
- Primary packing can be changed under pressure by engaging compression bolts
- Two 1/4" NPT ports (180° apart) for grease zerk & pressure gauge

SPECIFICATIONS	BSSP	BSTB™	BSDP
Working Pressure	1500 PSI	1500 PSI	1500 PSI
BTM Thread (API tubing or LP)	2", 2-1/2", 3"	2-3/8" & 2-7/8"	2", 2-1/2", 3"
Bottom Connection	Male	Female	Male
Weight			
• 2"	20 lbs.	24 lbs.	45 lbs.
• 2-1/2"	21 lbs.	25 lbs.	45 lbs.
• 3"	21 lbs.	26 lbs.	46 lbs.
Height	9-3/4"	11"	15"
Material	Ductile Iron*		
Split cone packing rod sizes	1", 1-1/8", 1-1/4", 1-5/16", 1-3/8" 1-1/2", 1-3/4"		
Pieces Required:			
• Top Cones	3	3	5
• Bottom Cones	1	1	1

*Corrosion-resistant coatings available, contact customer service.

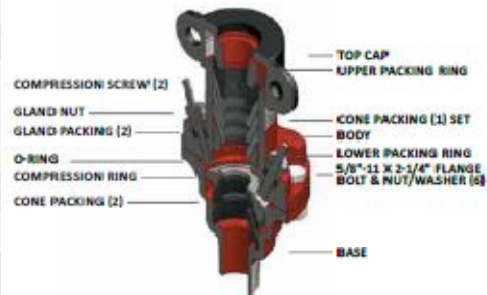

DOUBLE PACKED STUFFING BOX "BS" BODY ASSEMBLY