




Model Single Packed Stuffing Box (SPSB)

- Standard design
- Proven dependable performance
- Grease zerk
- Optional Oil Reservoir Gland (ORG) or Environmental Lube Upper Gland (ELUG™)
- Distinctive misaligning feature reducing need for exact pumping unit alignment



Model Tee Base Stuffing Box (TBSB)

- Combines stuffing box and pumping tee w/ 1" bleeder
- Eliminates one connection
- Side outlets:
 - 2" LP w/ 2" BTM connection
 - 3" LP w/ 2-1/2" or 3" BTM connection
- Grease zerk
- Optional Oil Reservoir Gland (ORG) or (ELUG™)




Model Double Packed Stuffing Box (DPSB)

- Most popular stuffing box in the industry
- Primary packing can be changed under pressure by engaging compression bolts
- Grease zerk
- Distinctive misaligning feature reducing need for exact pumping unit alignment
- Optional Oil Reservoir Gland (ORG) or Environmental Lube Upper Gland (ELUG™)
- Proven dependable performance

SPECIFICATIONS	SPSB	TBSB	DPSB
Working Pressure	1500 PSI	1500 PSI	1500 PSI
BTM Thread (API tubing or LP)	2", 2-1/2", 3"	2", 2-1/2", 3"	2", 2-1/2", 3", 4"
Bottom Connection	Male	Female	Male
Weight			
• 2"	24 lbs.	33 lbs.	50 lbs.
• 2-1/2"	25 lbs.	37 lbs.	51 lbs.
• 3"	26 lbs.	42 lbs.	52 lbs.
• 4"	N/A	N/A	56 lbs.
Height	13-1/2"	16"	17"
Material	Ductile Iron*		
Split cone packing rod sizes	1", 1-1/8", 1-1/4", 1-5/16", 1-3/8", 1-1/2", 1-3/4"		
Pieces Required:			
• Top Cones	4	4	6
• Bottom Cones	1	1	1

*Corrosion-resistant coatings available, contact customer service.

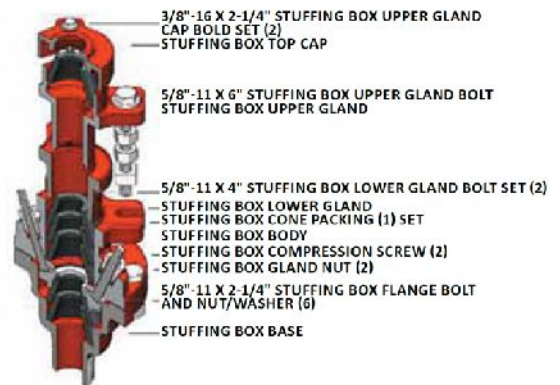

DOUBLE PACKED STUFFING BOX